


REVOLUTIONIZING PAINT STRIPPING





LOW ODOR. NO HARSH CHEMICALS.

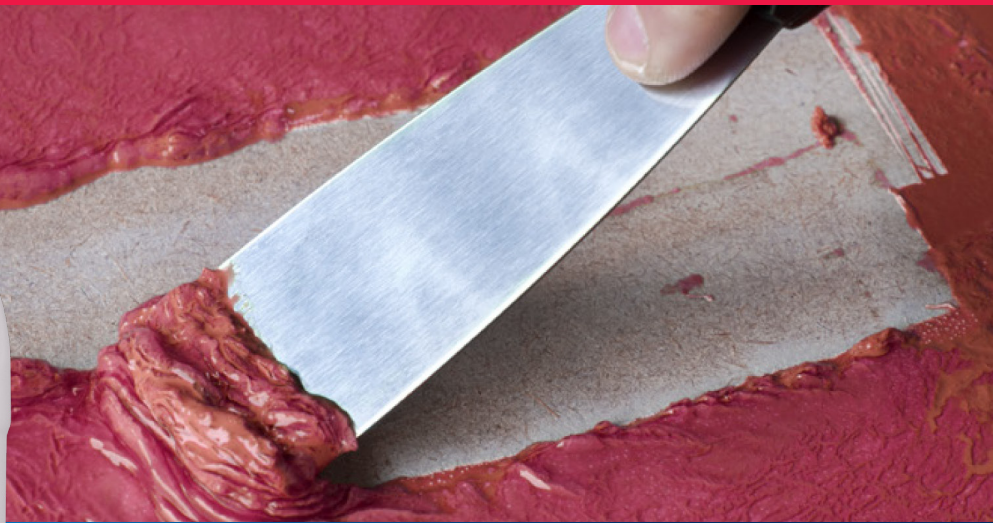

Safenol

Paint & Urethane Stripper

A SAFER PAINT STRIPPER

-  Removes paints, urethanes, enamels, sealers, some epoxies, lead paint & more
-  Removes multiple layers in ONE application
-  SAFER! No methylene chloride or harmful fumes
-  Non-caustic & eco-friendly



Horizontal Coverage: 125 sq ft per gallon
Vertical Coverage: 75 sq ft per gallon

See our full line of products


Visit: www.franmar.com or

Call: 800.538.5069





PRODUCT DATA

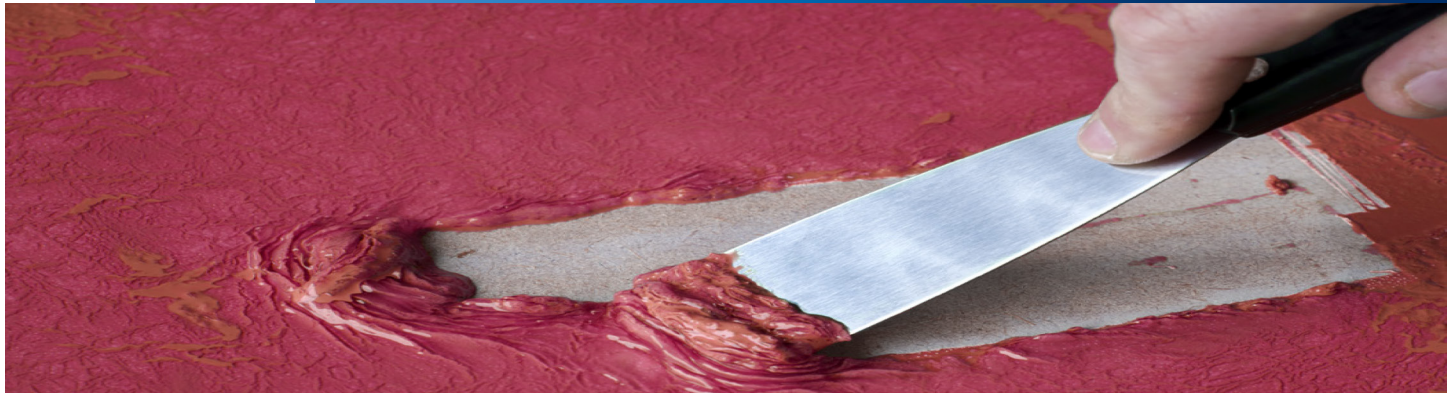

Safenol Paint & Urethane Stripper

Removing old paint doesn't have to mean toxic smells that linger long after a project is done. **BLUE BEAR Safenol Paint & Urethane Stripper** is a revolutionary, low-odor formula that works without harsh chemicals and hazardous fumes. It's easy to use, works for both indoor or outdoor use, and is great for the DIYer!

Usage Tips:

- When used outdoors, or for longer dwell times, cover with a 2 mil or thicker plastic sheeting over the work area to help keep **Safenol** wet and working.

Test Area: Due to variances in surfaces and conditions, test **Safenol** on a small, inconspicuous area before beginning the full project.

Application: **(1)** Use a paint brush to apply a thick layer of **Safenol** over the treatment area. Thickness of the stripper should exceed thickness of the coatings to be removed. Key to success is to apply thick enough. **(2)** Allow **Safenol** to work until all layers of the paint or coating have thoroughly softened. **(3)** Remove the coatings with a scraper or wet vacuum. Repeat as necessary.

Clean Up: To remove remaining surface residue, apply **BLUE BEAR® Emerge™ Cleaner & Degreaser** or soap and water to thoroughly clean the surface. Allow the surface to fully dry before refinishing.

Disposal: Guidelines vary for paint waste disposal by state. Dispose of in accordance with federal, state and local regulations.

Storage: Keep container closed when not in use.

Safe for use on: Concrete, masonry, wood, metal, fiberglass*

*Fiberglass must be attended. If left too long, Safenol could degrade resin.

Coverage: Coverage per square foot varies depending on type and age of coating, number of layers and method of application. One gallon will cover approximately 125 square feet on a horizontal surface, and approximately 75 square feet on a vertical surface.

Precautions: Always wear safety glasses to prevent splatters causing eye irritation, chemical-resistant gloves (e.g., to protect from skin irritation and dryness), and work-appropriate shoes. Use a plastic drop cloth to protect floors and surrounding areas, and/or landscaping if outdoors. Open windows to maintain ventilation of the work area. Concrete surfaces may darken with use of the product.

Biodegradable: Meets or exceeds ASTM standards

Flash Point: None

pH Level: 6.5

CAUTION: Contact with eyes may cause irritation. May be harmful if swallowed. Use gloves to avoid mild skin irritation and/or dryness. Keep out of reach of children.

Ingredients: Safenol™ solvent; water; dibasic ester, surfactant, fumed silica, cellulose ether powder

VOC (Volatile Organic Compound) content: 49%, 4.249 lb/g, 509 g/l
California and OTC compliant

www.franmar.com
800-538-5069
10282 E 1400 North RD
Bloomington, IL
61705

CHEMICAL EMERGENCY:
Spill, leak, fire, exposure or accident,
call CHEMTREC day or night.
USA and Canada: 800.424.9300
CCN717946 or +1 703.527.3887



www.franmar.com
Rev. 7/21/25